


# LUNA 6

ROUND FIXED TRIMLESS IP65



LUCERNA  
LIGHTING

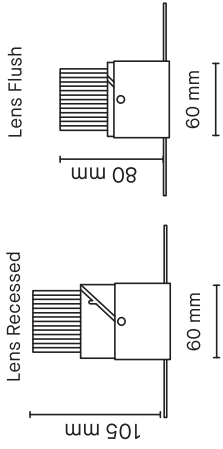

# LUNA 6

## ROUND FIXED TRIMLESS IP65

Discrete, low glare downlight with a recessed lens for minimal visual impact.

Lens Position	Lens Fixed	Lens Flush				
Light Source	LED - Xicato XTM	LED - Xicato XTM	LED - Xicato XTM	LED - Xicato XTM	LED - Xicato XTM	LED - Xicato XTM
	* Halogen - GU5.3	* Halogen - GU5.3	* Halogen - GU5.3	* Halogen - GU5.3	* Halogen - GU5.3	* Halogen - GU5.3
	* GU5.3 LED lamps	* GU5.3 LED lamps	* GU5.3 LED lamps	* GU5.3 LED lamps	* GU5.3 LED lamps	* GU5.3 LED lamps
	* GU10 LED lamps	* GU10 LED lamps	* GU10 LED lamps	* GU10 LED lamps	* GU10 LED lamps	* GU10 LED lamps
Lamp Lumens	720lm	965lm	1300lm	1300lm	1300lm	1300lm
Efficacy	97Lm/W	89Lm/W	83Lm/W	83Lm/W	83Lm/W	83Lm/W
Power Supply	7.4w	10.9w	15.6w	15.6w	15.6w	15.6w
Supply Current	350mA	500mA	700mA	700mA	700mA	700mA
CRI	>95 (Typical 97)	>95 (Typical 97)	>95 (Typical 97)	>95 (Typical 97)	>95 (Typical 97)	>95 (Typical 97)
Beam Angle	16° 24° or 40°	16° 24° or 40°	16° 24° or 40°	16° 24° or 40°	16° 24° or 40°	16° 24° or 40°
Colour Temperatures	2700K 3000K 3500K or 4000K	2700K 3000K 3500K or 4000K	2700K 3000K 3500K or 4000K	2700K 3000K 3500K or 4000K	2700K 3000K 3500K or 4000K	2700K 3000K 3500K or 4000K
Drivers`	Mains 1-10V Dimmable or DALI	Mains 1-10V Dimmable or DALI	Mains 1-10V Dimmable or DALI	Mains 1-10V Dimmable or DALI	Mains 1-10V Dimmable or DALI	Mains 1-10V Dimmable or DALI
Cut-Out	65mm	65mm	65mm	65mm	65mm	65mm

\* Available upon request

Manufactured by Lucerna Lighting  
[www.lucernalighting.com](http://www.lucernalighting.com) - Tel. +44 (0) 203 110 0140



Simple plug and play connectors for ease of installation.